


TPF reaction arm


Work safer, gain control over bolt load



- Works safer: No pinching hazards
- Prevents damaged coatings and flanges
- Lower side load by abutting further away from the tool:
- Improved control, more accurate bolt load
- Quick and easy to place due to the rotatable cup

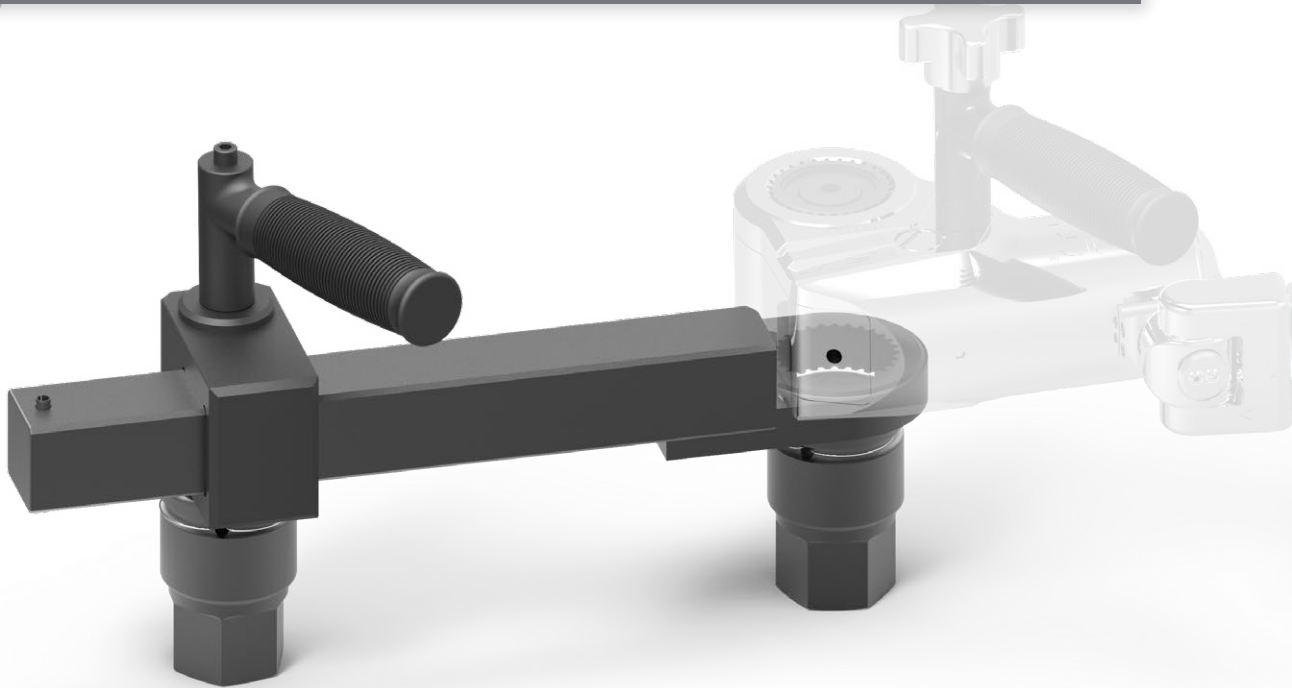

Use and exchange standard sockets quick and easy.

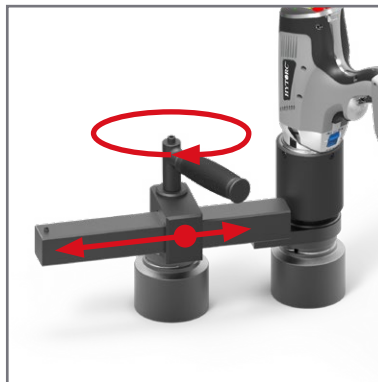

The reaction socket, cup, or pin cup can be moved freely over the length of the arm.



Increase ease of use and prevent injuries by equipping both the TPF and the tool with a Safety Handle.

HYTORC
INDUSTRIAL TORQUE & TENSIONING SYSTEMS

Learn more?

call +31 24 3660 660 or visit hytorc.nl




Compatible with hydraulic, pneumatic and electric torque wrenches. Work safer, faster and more accurate.

Model	Min. length L1	Max. length L2	SQ
Type .7	57 mm	305 mm	¾"
Type 01	80 mm	280 mm	¾"
Type 03	120 mm	305 mm	1"
Type 05	115 mm	305 mm	1 ½"
Type 08	150 mm	470 mm	1 ½"
Type 10	185 mm	360 mm	1 ½"

Mentioned models can be equipped with standard sockets and are on stock. Custom models available by request.



High speed, minimum side load and no damaged coatings: TPF with Allen sockets on a jGun pneumatic torque wrench.

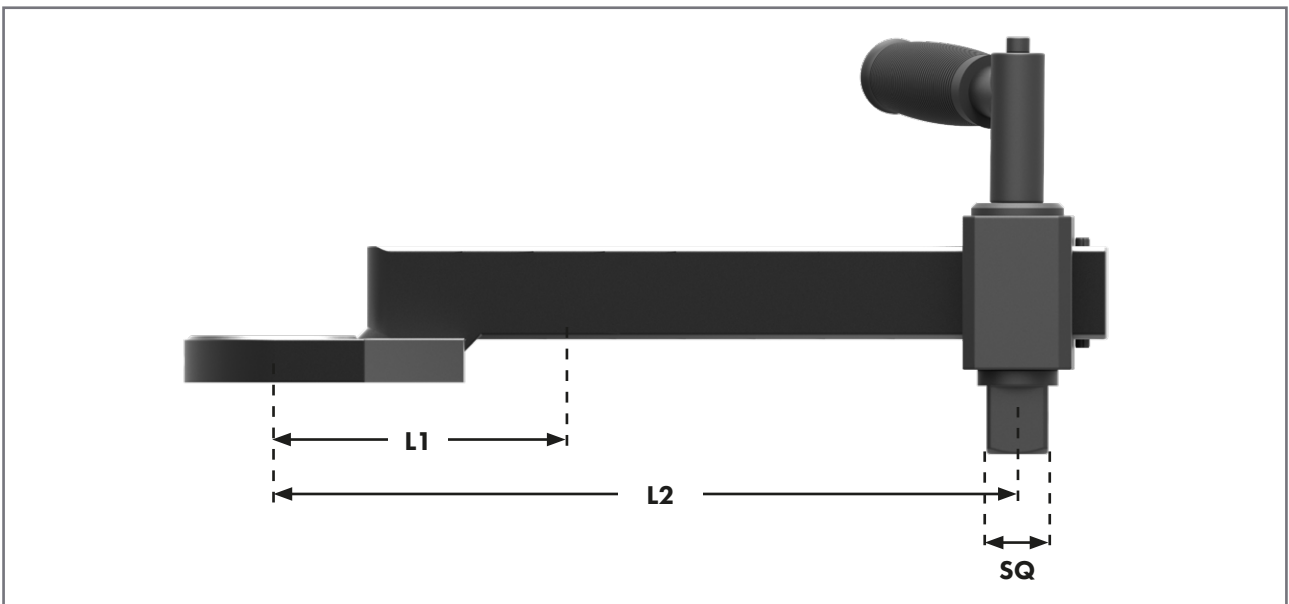

Ww-13-03-19

To the values given no rights can be derived. CAD models can be sent on request.

HYTORC

HYTORC Nederland BV **HYTORC Benelux BVBA**
 Tel. +31 24 3660 660 Tel. +32 38 705 220
 www.hytorc.nl www.hytorc.be