

Stealth

Simply the most productive ratchet link

- Double piston system for extra speed.
- For limited clearance and/or protruding threaded ends.
- Reaction pawl absorbs torsion.
- Key width 17 mm - 230 mm.



This tool is compatible with the award winning HYTORC Washer System™. This smart innovation improves safety, accuracy and speed.



This tool is perfect for multi-tooling purposes. By using multiple tools simultaneously, flanges can be closed much faster and more accurate.



Use the 360° x 180° swivel to keep hoses out of the way.



Reaction arm free abutting with the HYTORC washer-system.




Change the key width by simply replacing the ratchet link.

HYTORC[®]
INDUSTRIAL TORQUE & TENSIONING SYSTEMS

Learn more?

Call +31 (0)24-3660 660 or visit hytorc.nl

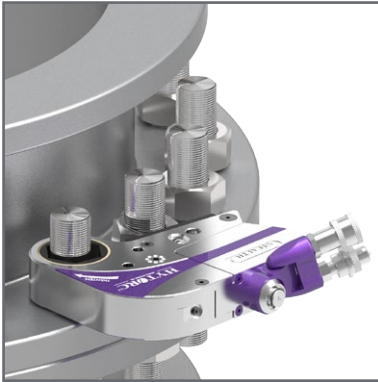


For limited clearance and/or protruding threaded ends.



The Stealth is compatible with a wide range of standard, custom and safety reaction arms and accessories, including the HYTORC washer driver.

Model	min. torque Nm	max. torque Nm	min. radius mm	max. radius mm	min. AF mm	max. AF mm	H mm	L mm	W mm	Weight kg
Stealth - 2	377	2.534	27	44	17	60	107	140	32	2,5
Stealth - 4	819	5.450	44	53	36	80	138	167	42	5
Stealth - 8	1.625	10.825	47	58	50	100	163	203	53	9,5
Stealth - 14	2.854	19.327	64	87	60	120	202	237	64	15,5
Stealth - 22	4.406	29.659	90	112	80	155	234	276	74	28,5
Stealth - 36	6.665	47.077	108	142	100	230	274	322	86	39,5

* Average weight of a combination of average power head and ratchet link.

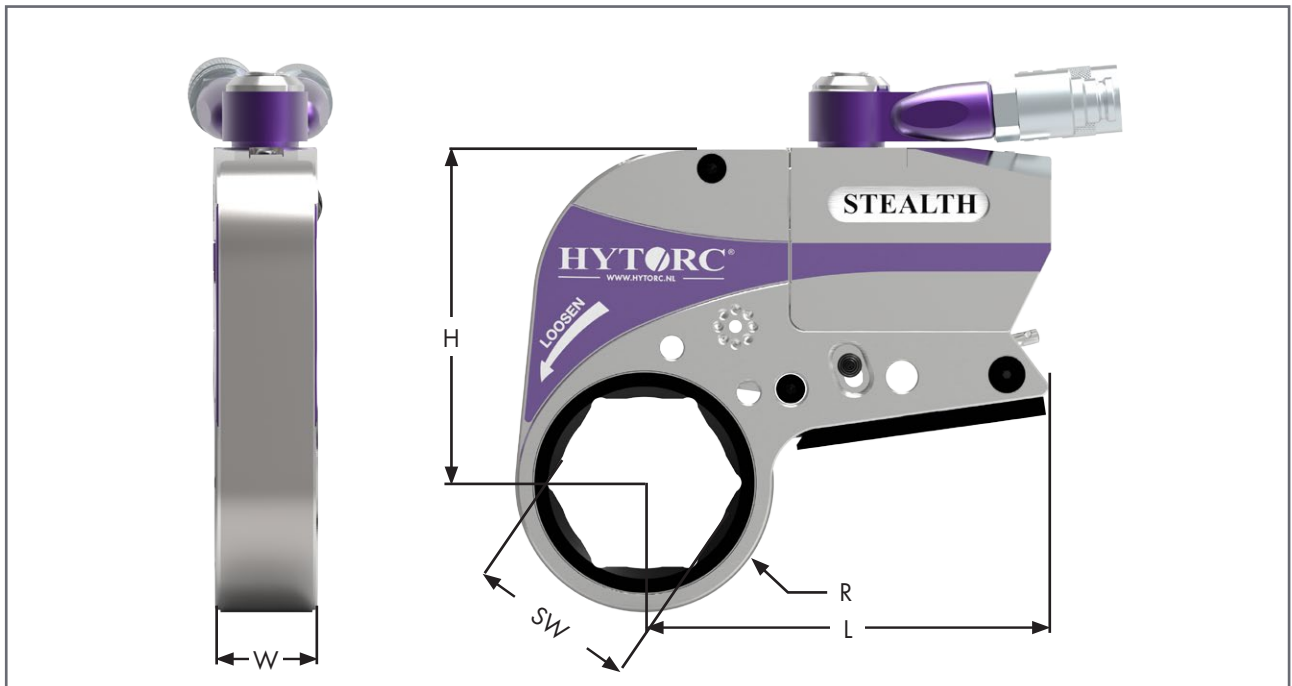

Ver. 13-10-17

To the values given no rights can be derived.
All tools are supplied with a calibration report.

HYTORC®

HYTORC Nederland BV
Tel. +31 24 3660 660
www.hytorc.nl

HYTORC Benelux BVBA
Tel. +32 38 705 220
www.hytorc.be